

## Foobar2000

Make sure you have Foobar2000 latest version or at least higher than (1.3.1 at the time of writing):

### Step 1 Additional Foobar components installation

In order to correctly play DSD files, you need to install additional Foobar components (or plug-ins):


- ASIO support 2.1.2 or newer (<http://www.foobar2000.org/components>)
- The SACD decoding support, version 0.6.6; it contains also the ASIOProxy installer (<http://sourceforge.net/projects/sacddecoder/files/>)

First install the foobar2000 program, then the two plugins.

Then you can install the ASIOProxy that is on the "SACD plugins" folder.


### Step 2 Foobar2000 HD DAC settings

Open the menu "**Library -> Configure**". In the left panel, select the "**Components**" entry. You should see the following components/plugins installed:

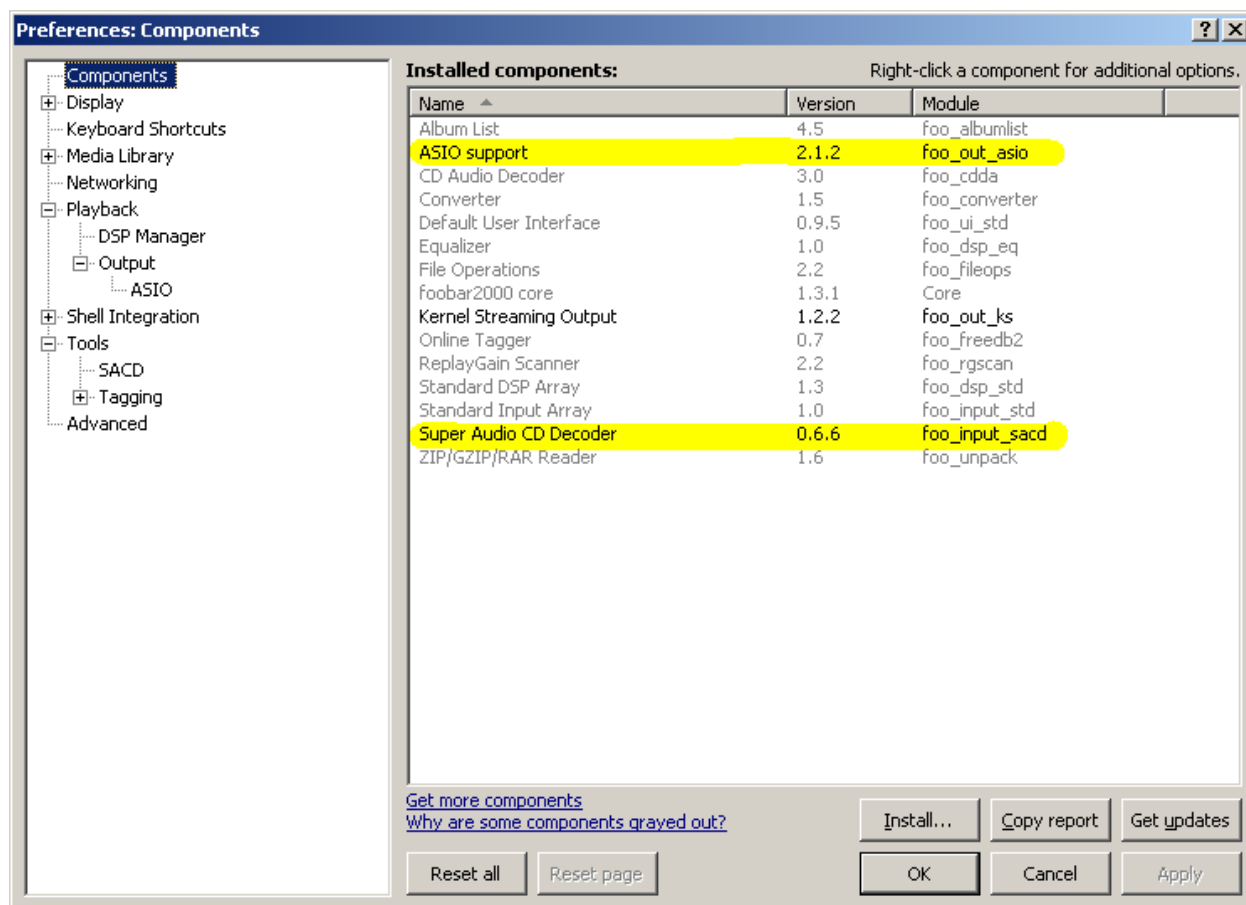


If they are not installed, go back to step 1.


In the left panel, expand the “**Playback**” option. Go to “**Playback->Output**” option, and in **Device** select “**ASIO : foo\_dsd\_asio**”.

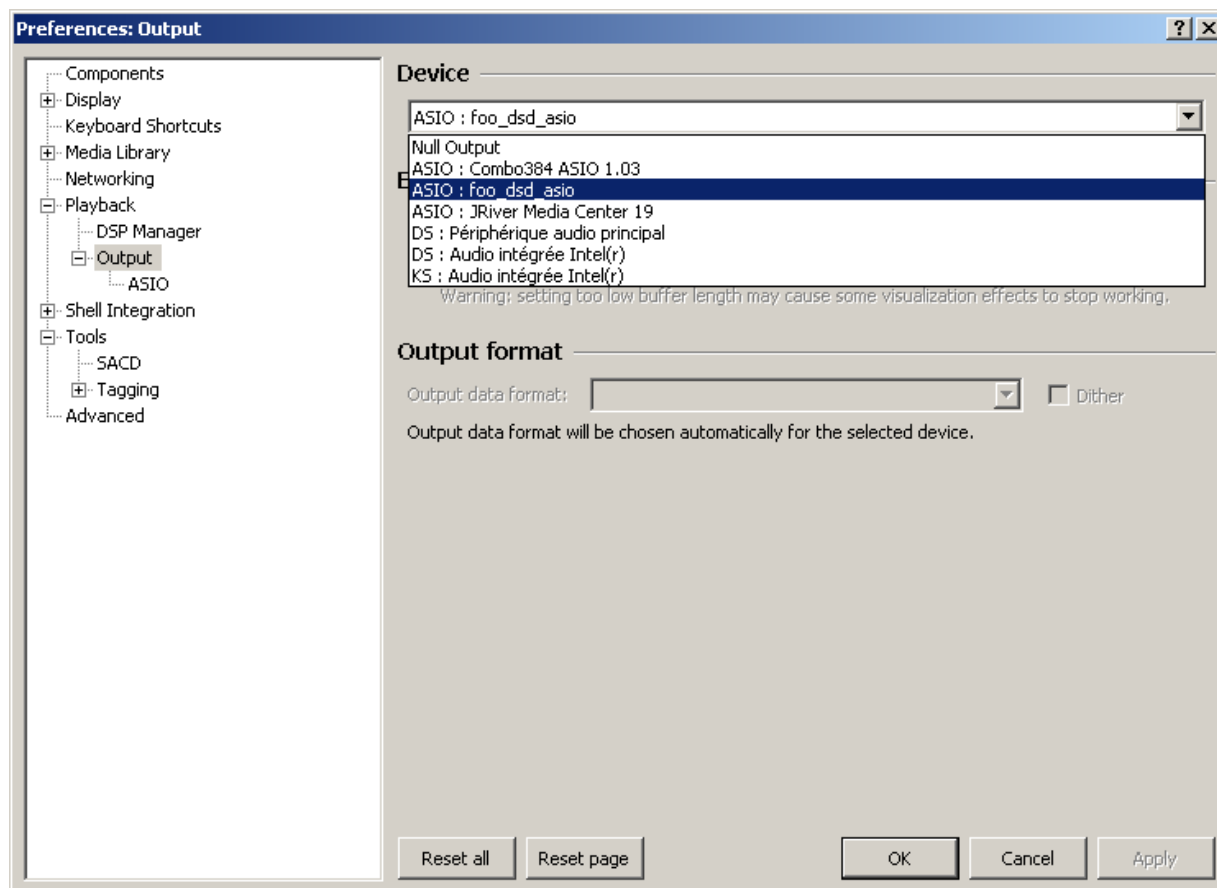

Double-click on the “**foo\_dsd\_asio**” driver, and configure it as follows (yellow marked options):

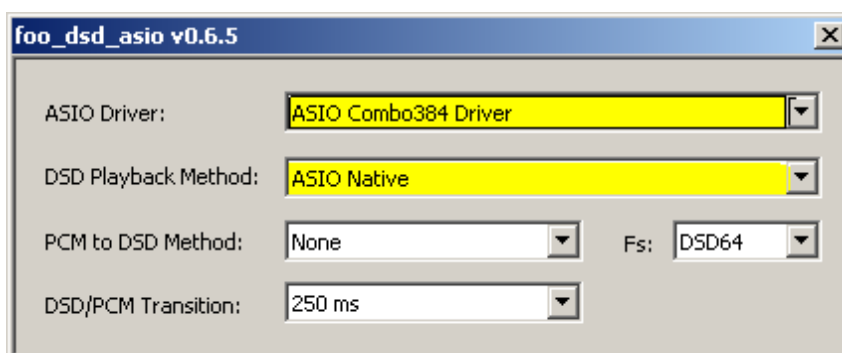

In the left panel, expand the “**Tools**” option. Go to “**Tools->SACD**” option, and configure the “**ASIO Driver Mode**” setting to “**DSD**”:

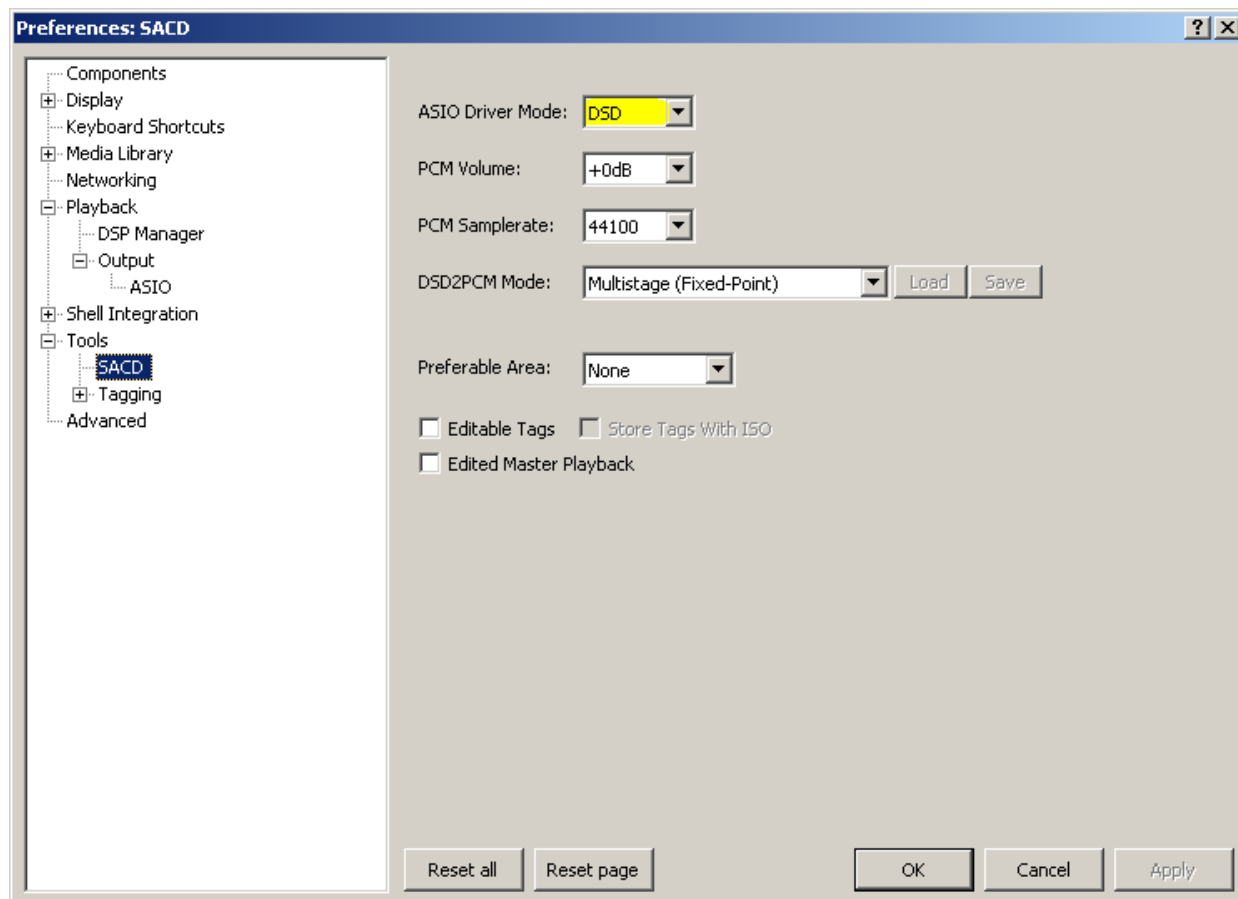

You can now play transparently all your audio files, either in PCM or in DSD format, with your Nagra HD DAC.