

NAGRA VI SERVICE BULLETIN

APPLICATION


- To use an external keyboard or other equipment on the host USB, 3 pull up resistors need to be added on the digital unit PCB. 9132 220 000.

Remove the lower cover from the Nagra VI to gain access.

See the pictures concerning the position of the 3 resistors.


Add a resistor of 10 k Ω :

Between pin 2 & 7 of U5
 Between pin 2 & 7 of U13
 Between U5 pin 1 and C11 pin +.

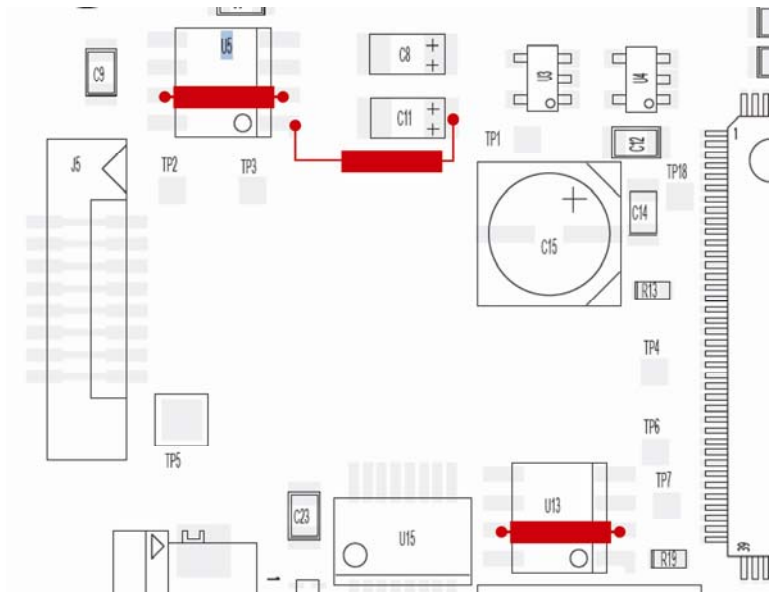

PARTS

10 k Ω 1/8 Watt
 Part number: 5527182103

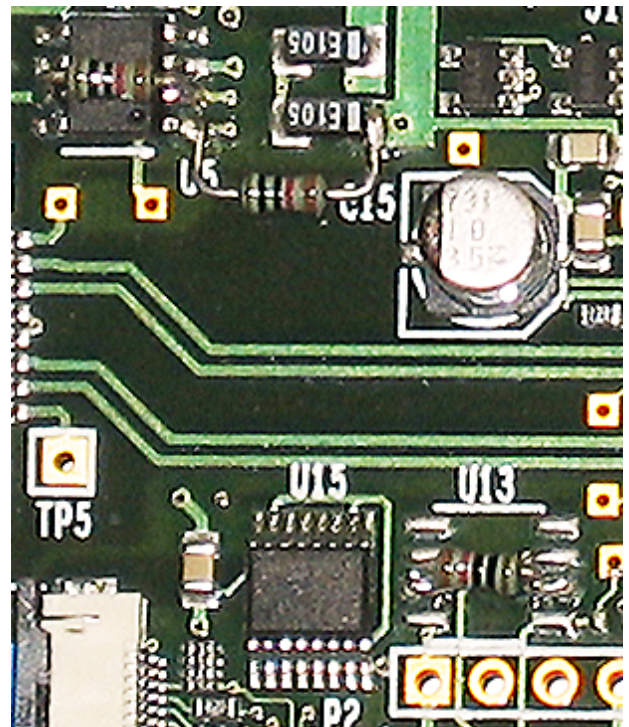

(OME32016)
 NAGRAVISION SA
 March 27, 2009

KUDELSKI GROUP
 NAGRAVISION
 CH-1033-CHESEAUX
 TEL+41 21 732 0101
 FAX+4121 732-0100

NAGRA