

## NAGRA VI SERVICE BULLETIN

### APPLICATION

- To use an external keyboard or other equipment on the host USB, 3 pull up resistors need to be added on the digital unit PCB. 9132 220 000.

Remove the lower cover from the Nagra VI to gain access.


See the pictures concerning the position of the 3 resistors.

Add a resistor of 10 k $\Omega$ :

Between pin 2 & 7 of U5

Between pin 2 & 7 of U13


Between U5 pin 1 and C11 pin +.

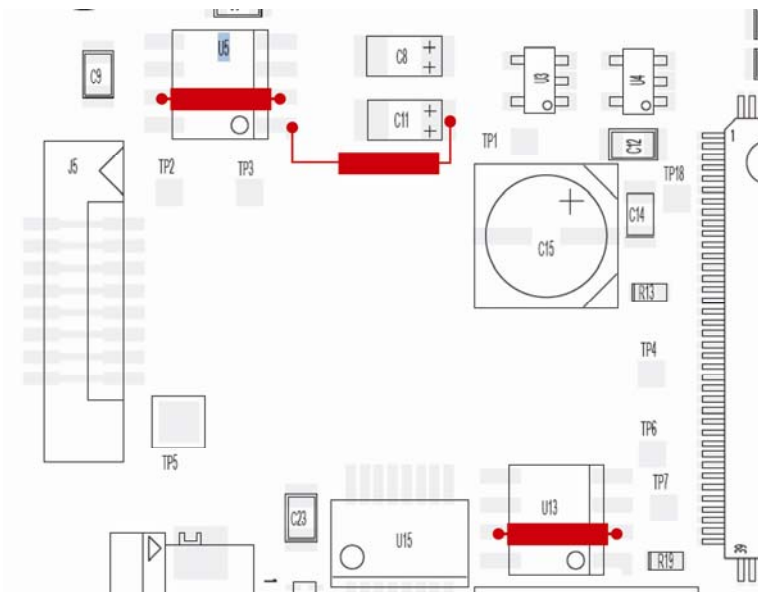

### PARTS

10 k $\Omega$  1/8 Watt

Part number: 5527182103

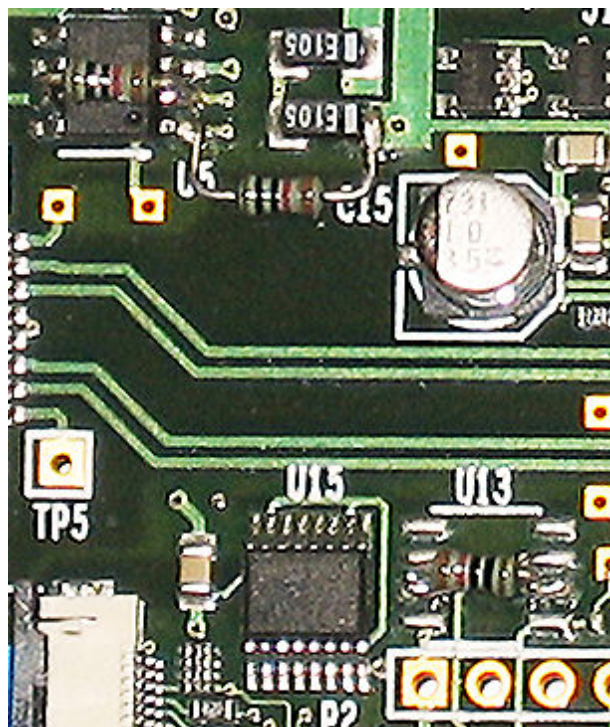

(OME32016)  
NAGRAVISION SA  
March 27, 2009

KUDELSKI GROUP  
NAGRAVISION  
CH-1033-CHESEAUX  
TEL+41 21 732 0101  
FAX+4121 732-0100

# NAGRA