


JRiver Media Center

Make sure you have JRiver 19.0.128 version or higher, you can download it from their website www.jriver.com

JRiver HD DAC settings

Open the menu “**Tools->Options...**”.


In the left panel, select “**Audio**”.

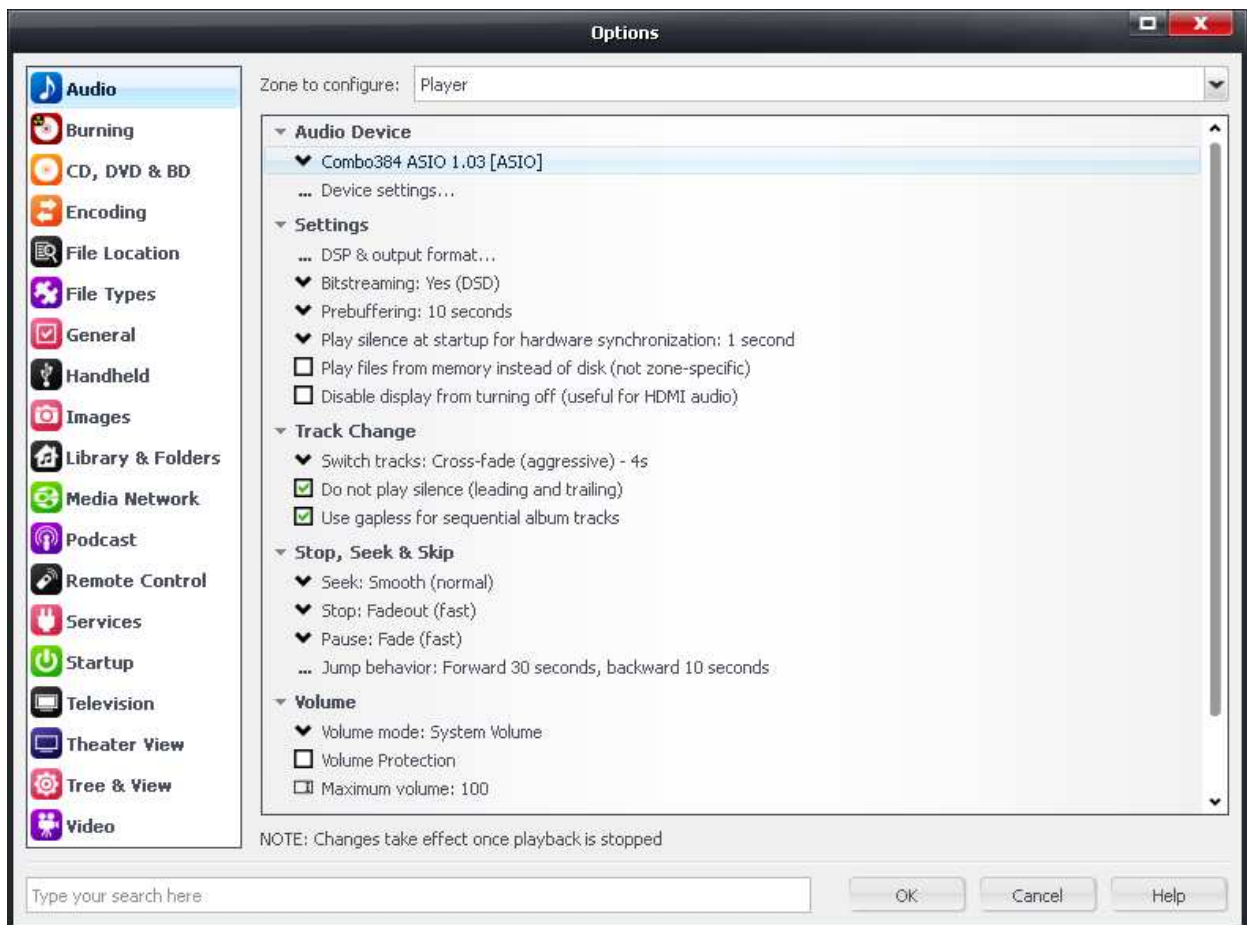

Select the “**Audio Device**” option, and select “**Combo384 [ASIO]**”



In the “**Settings**” options, select the “... **DSP & output format...**”. Select the “**Output Format**” parameters:

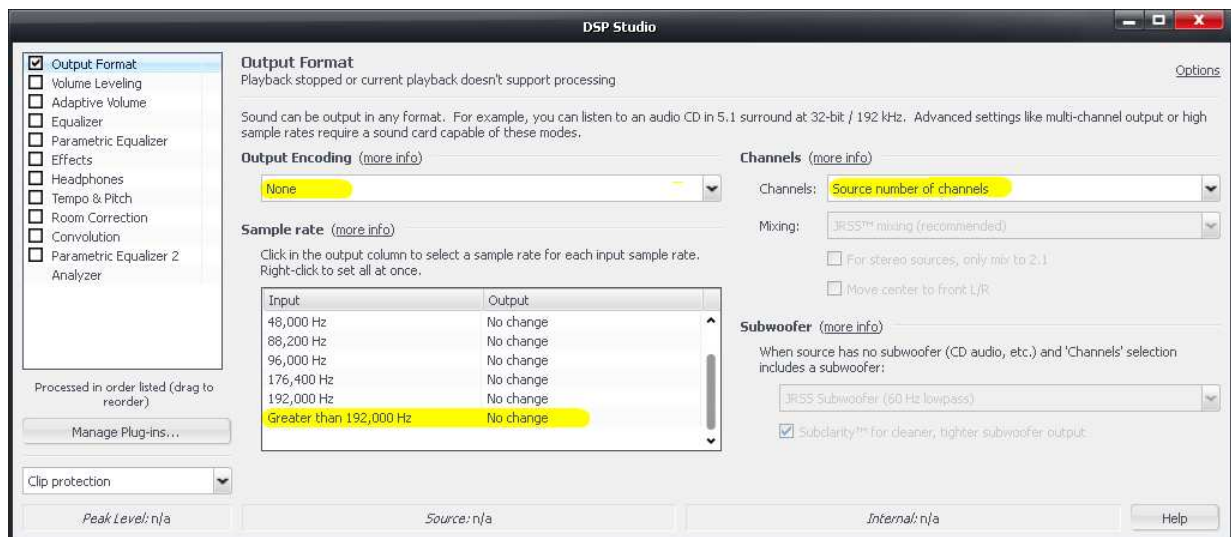

Select the following parameters:


“**Output Encoding**” > “**None**”

“**Channels**” > “**Source number of channels**”


“**Sample rate**” named “**Greater than 192.000 Hz**” > “**No change**”

in order not to downsample the PCM audio at 352.8 and 384 kHz

Back to the main audio options window, select the “**Bistreaming**” option, and scroll down to “**DSD**” :

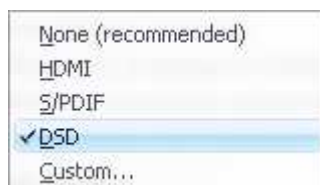

The “Bitstreaming” option should appear as “Yes (DSD)” :

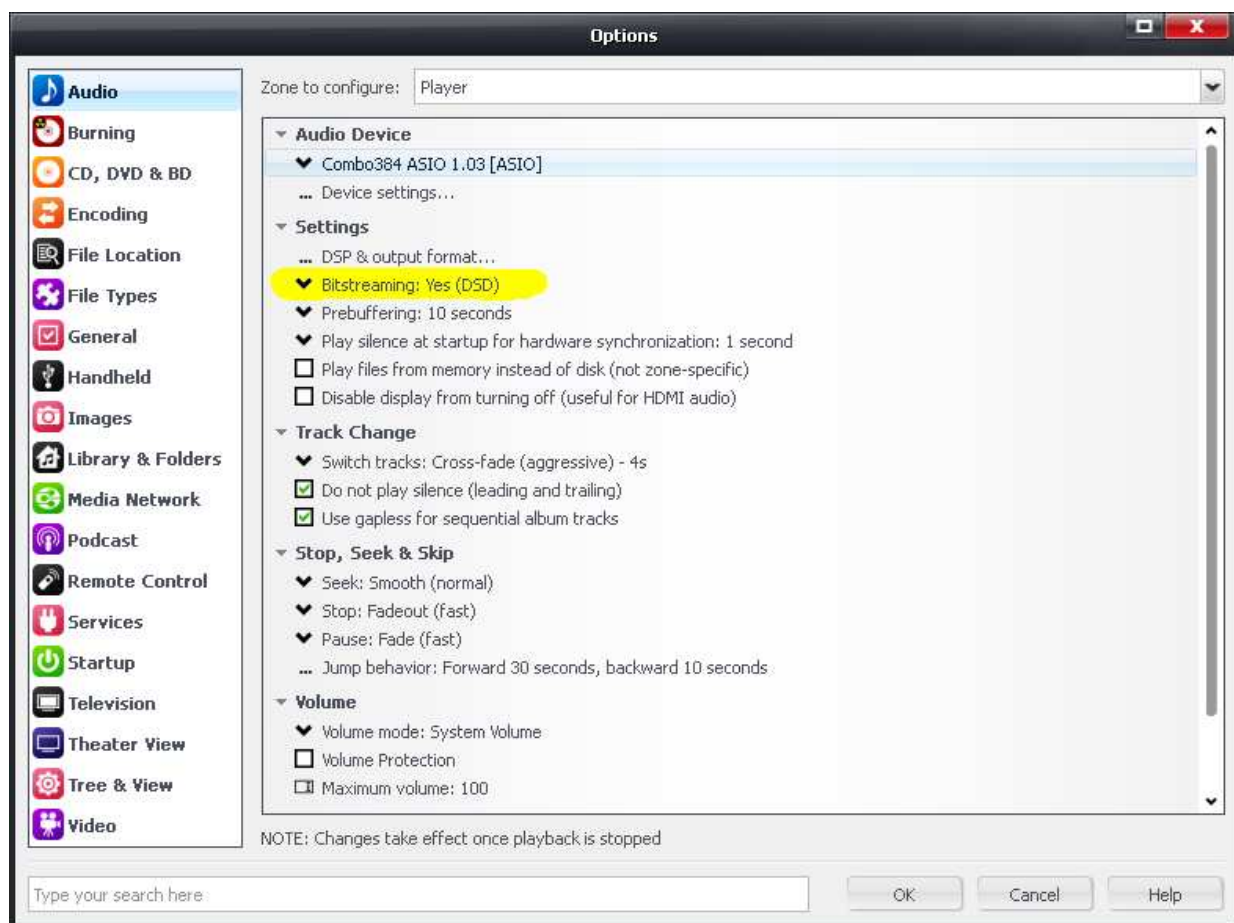

You can now play transparently all your audio files, either in PCM or in DSD format, with your Nagra HD DAC.